



MASTER INSTRUMENT CORPORATION

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER SS12 THRU SS110

VOLTAGE RANGE 20 to 100 Volts
Forward Current 1.0 Amperes


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- For surface mount applications
- Guard ring for over voltage protection
- Low power loss, high efficiency
- High current capability, Low forward voltage drop
- High surge capability
- For use in low voltage, high frequency inverters, Free wheeling, and polarity protection applications
- High temperature soldering guaranteed:
250 °C/10 seconds at terminals

MECHANICAL DATA

- Case: JEDED SMA (DO-214AC) molded plastic body
- Terminals: Solder Plated, solderable per MIL-STD-750 Method 2026
- Polarity: Color band denotes cathode end
- Weight: 0.002ounce, 0.064 gram

SMA(DO-214AC)

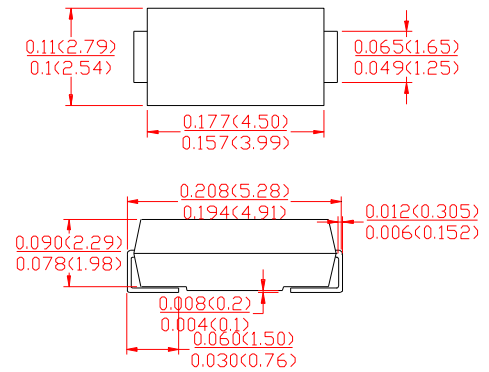

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate by 20%.

		SYMBOLS	SS12	SS13	SS14	SS15	SS16	SS18	SS19	SS110	UNITS
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	20	30	40	50	60	80	90	100	Volts
Maximum RMS Voltage		V _{RMS}	14	21	28	35	42	56	63	70	Volts
Maximum DC Blocking Voltage		V _{DC}	20	30	40	50	60	80	90	100	Volts
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length (see Fig.1)		I _(AV)	1.0								Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)		I _{FSM}	30.0								Amps
Maximum Instantaneous Forward Voltage of 1.0A (Note 1)		V _F	0.55			0.75		0.85			Volts
Maximum instantaneous Reverse Current at rated DC blocking voltage (Note 1)	T _A =25 °C	I _R	0.5								mA
	T _A =125 °C		10								
Typical thermal capacitance (Note 2)		R _{QJL} R _{QJA}	28.0 88.0								°C/W
Operating and Storage Temperature Range		T _J	-65 to +125				-65 to +150				°C
Storage temperature range		T _{STG}	-65 to +150								

NOTES:

- Pulse test: 300µs pulse width, 1% duty cycle.
- P.C.B. Mounted with 0.2*0.2"(5.0*5.0mm) copper pads.



MASTER INSTRUMENT CORPORATION

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER
SS12 THRU SS110

VOLTAGE RANGE 20 to 100 Volts
Forward Current 1.0 Amperes

RATINGS AND CHARACTERISTIC CURVES SS12 THRU SS110

Fig. 1 - Forward Current Derating Curves

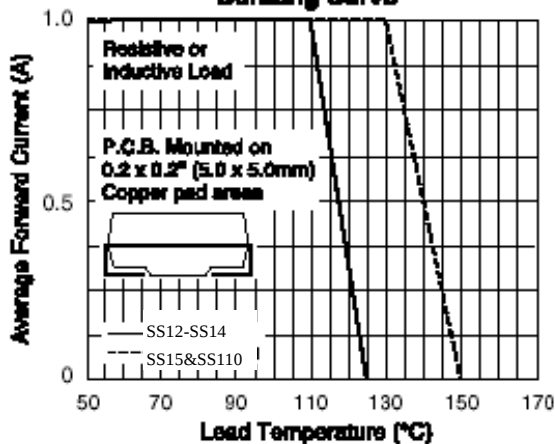


Fig. 2 - Maximum Non-repetitive Surge Current

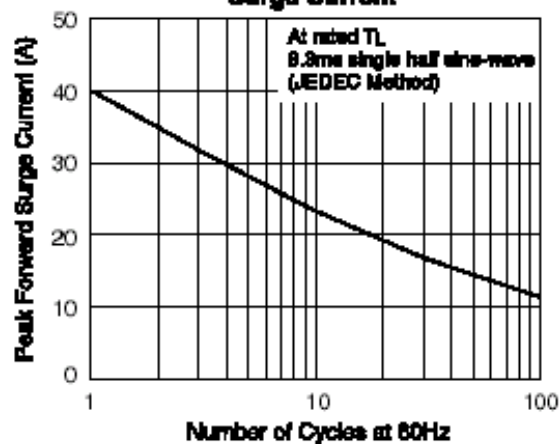


Fig. 3 - Typical Instantaneous Forward Characteristics

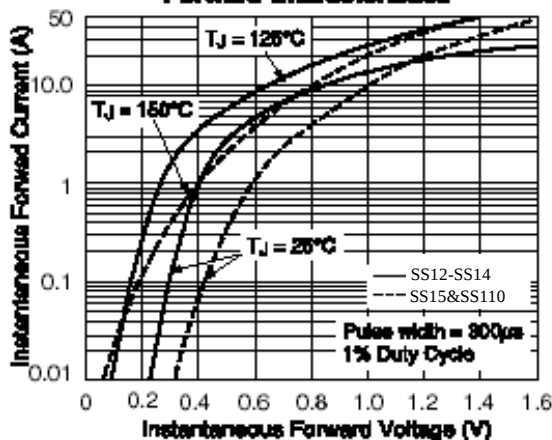


Fig. 4 - Typical Reverse Current Characteristics


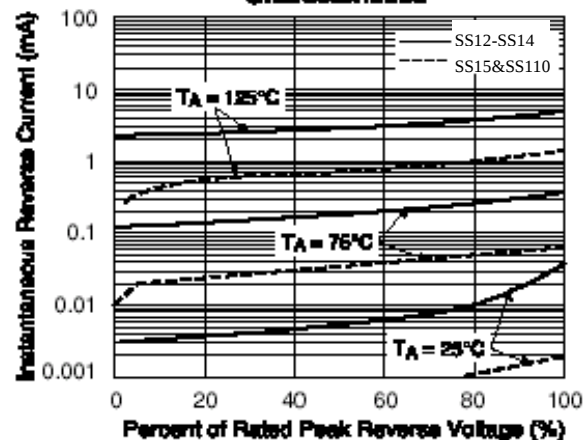


Fig. 5 - Typical Junction Capacitance



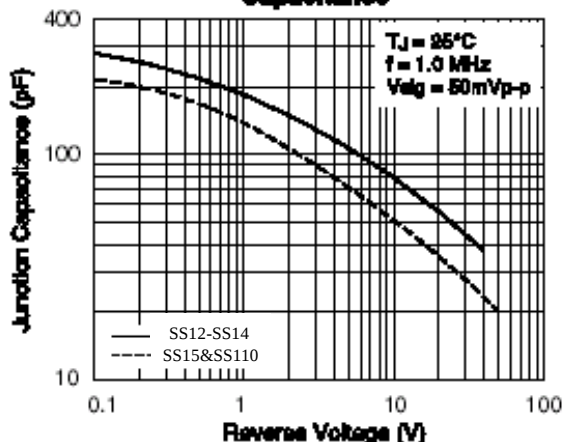

MASTER INSTRUMENT CORPORATION

**SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER
SS12 THRU SS110**

VOLTAGE RANGE	20 to 100 Volts
Forward Current	1.0 Amperes